

Spesifikasjons Data

Dreibord m/elektrisk tilt

Kapasitet : 250kg

Rock Dreiebord Modell LPE 0,25WD-serien er designet for å gi maksimal posisjonering fleksibilitet ved hjelp av tilt og rotasjon av bordplaten for å manipulere arbeidsstykket i riktig 'posisjon for sveising eller å posisjonere presist for montering og produksjonskrav. Bordet er maskinert med fire radiale spor for feste ankerbolter, og sentrisk merking på bordflaten, til et sett av koniske lagre montert under bordet gi en jevn og konstant dreining under drift. Drevet av en DC motor. En variabel hastighet styrt av ett standard styreblad med lav spenning, trykknapper, og et potensiometer med en 3-meter lang styrkabel. Tilt bevegelsen er elektrisk drevet drives av 500W DC-motor med dynamiskbremsing gjennom redusering i girkasse.

Ferdig monter 300 ampere roterende jordklemme for å sikre god jording for sveisestrømmen

Bord diameter 500mm.



Modell:	LPE 0.25-WD
Kontroll Panel:	24VDC krets med trykk knapp, og 3 mtr. kabel
Primærspenning:	220V/1phase/50Hz
Rotasjons Kapasitet:	250 kg. ved 300
Rotasjonshastighet:	0 to 4. rpm
Tilting Kapasitet:	250kg ved 300mm c og g.
Tilt Område:	0 to 135°
Tilt Hastighet:	0-135 Gr.30 sekunder
Rotasjons Motor:	65W motor
Rotasjons drivkontroll:	DC motor kort
Tilt Driv Motor:	500W DC
Omtrentlig vekt:	350kg




Specification for Positioner

1	Model	LPE0.25-WD
2	Capacity (Turning)	250kg@300mm(Please refer to load chart)
3	Capacity (Tilting)	250kg@300mm(Please refer to load chart)
4	Electrical Panel	Yes
5	Rotation Speed/power	0-4rpm AT 0-90V /DC 100W
6	Tilt Range/power	0-135° in 30sec/DC 500W
7	Incoming Supply	220V-1P-50HZ
8	Control Voltage	24VDC
9	Rotation Drive Control	DC Motor Card
10	Control Means	Foot Switch (Toggle Type) c/w 3m Cable
11	Table Size	Ø500X20t C/W 4X slot(18)
12	Earthing	300A
13	Surface Preparation	Gritblast to SA2.5
14	Painting	Powder Coating
15	Color	RAL 3003 RED & RAL9005 BLACK FOR TILTING BOX AND TABLE
16	Qty	1 unit
17	Est Weight(kg)	220
18	Shipping dimension/cm	93(L)X70(B)X77(H)

Note : :

1) This drawing is accurate at time of preparation and may be subjected to final design.

LOAD CHART

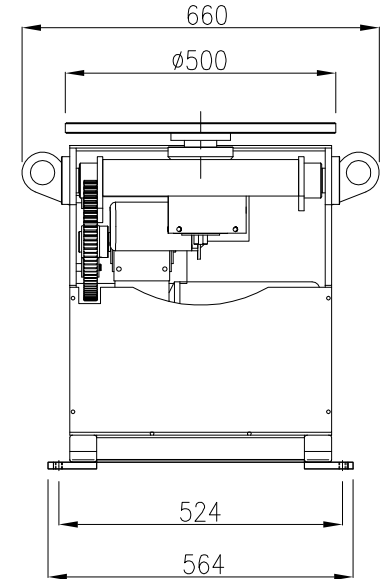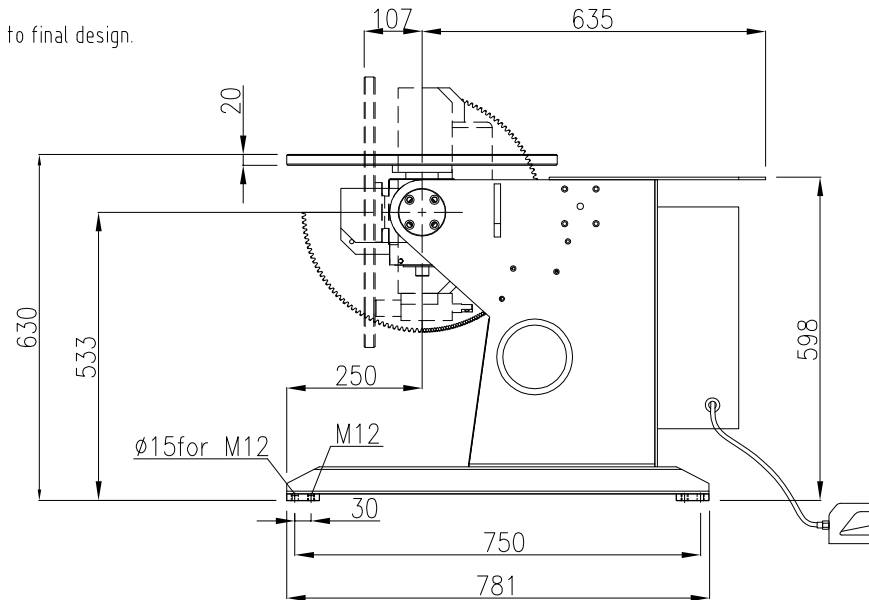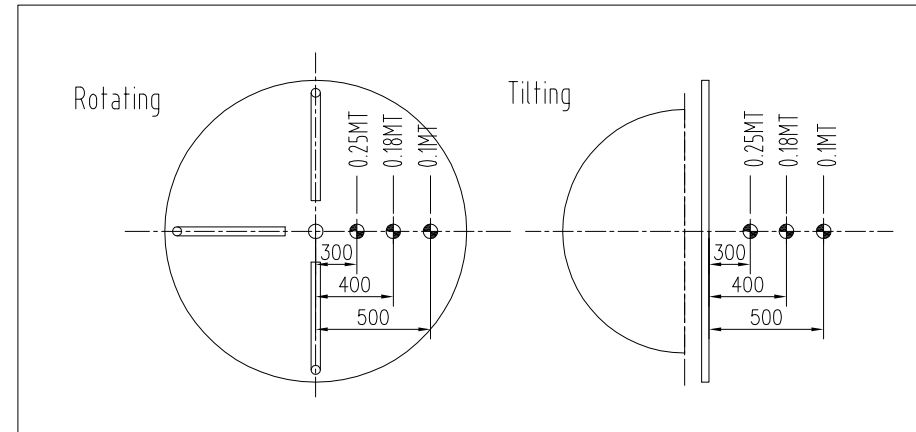

All dimensions in mm unless otherwise specified.

	CUSTOMER APPROVAL	CHECKED BY:	DRAWN BY:	CUSTOMER:	SCALE: N.T.S.
				DRAWING NAME: 250kg Positioner	
				DRAWING NO.: LPE0.25-WD	REVISION: 2
				THE ORIGINAL AND ALL COPIES OF THIS DRAWING TOGETHER WITH THE COPYRIGHT THEREOF ARE THE SOLE PROPERTY OF RED ROCK. DESIGN AND SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.	



CUSTOMER APPROVAL

CHECKED BY:

DRAWN BY:

CUSTOMER:

DRAWING NAME:

250kg Positioner

DRAWING NO.:

LPE0.25-WD

THE ORIGINAL AND ALL COPIES OF THIS DRAWING TOGETHER WITH THE COPYRIGHT THEREOF ARE THE SOLE PROPERTY OF RED ROCK. DESIGN AND SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

SCALE:
N.T.S.

REVISION:

2

SHEET:
1 OF 1