


RULLEBUKKER MED DOBBELDRIFT

Standard utstyr:

1 stk. Drivenhet med drift på begge hjul

1 stk. Frittgående støtteenhet

1 stk. Fjernstyring

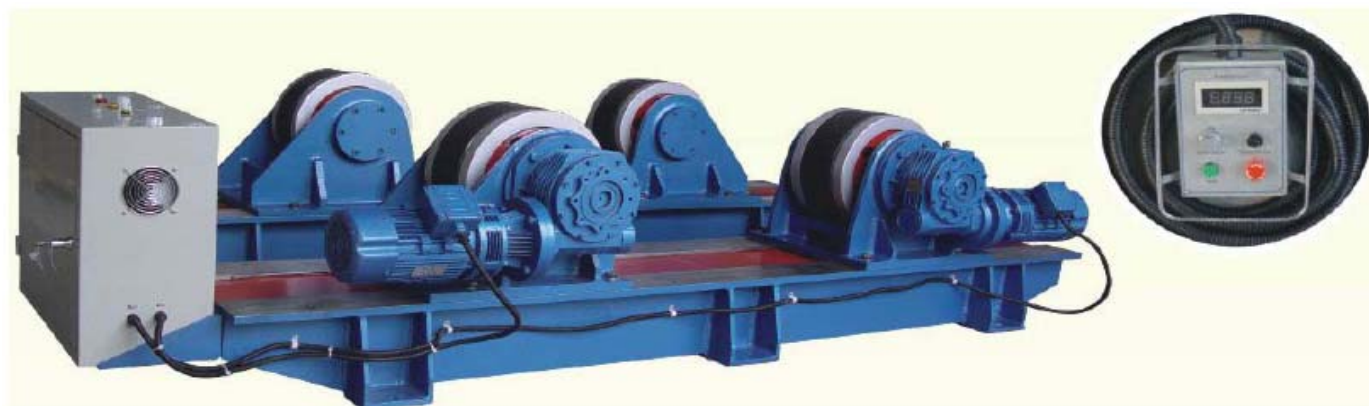

Tye	Belastning Max. Kg.	Kapasitet mm	Gummi ruller	Stål Ruller	Rotasjons Hastighet m/m	Motor Kw
RB-2	2000	ø150-2000	Ø200-80		0,1-1,0	2 x 0,18
RB-3	3000	ø250-1500	ø200-100	2xø194x20	0,1-1,0	2 x 0,25
RB-5	5000	ø250-2300	ø250-100	2xø240x20	0,1-1,0	2 x 0,37
RB-10	10000	ø320-2800	ø300-120	2xø290x25	0,1-1,0	2 x 0,55
RB-20	20000	ø500-3500	ø350-120	2xø340x30	0,1-1,0	2 x 1,1
RB-40	40000	ø600-4200	ø400-120	2xø390x40	0,1-1,0	2 x 1,5
RB-60	60000	ø750-4800	ø450-120	2xø440x50	0,1-1,0	2 x 2,7
RB-80	80000	ø850-5000	ø500-120	2xø490x60	0,1-1,0	2 x 3,0
RB-100	100000	ø1000-5000	ø500-120	2xø490x70	0,1-1,0	2 x 4,0
RB-160	160000	ø1100-6000			0,1-1,0	2 x 4,0
RB-250	250000	ø1100-7500			0,1-1,0	2 x 5,5
RB-500	500000	ø1500-8000			0,1-1,0	2 x 11
RB-630	630000	ø1500-9000			0,1-1,0	2 x 11